

# i-SENSYS X 1440P Series

# FULLY SECURE, HIGH-SPEED DEVICES Delivering High-Quality Print Output

Compact and secure A4 black and white laser printers to complement larger office print solutions





# i-SENSYS X 1440P Series

## 

- Print from mobile devices, wherever you are
  Remote device set-up and control with the
- Canon Print Business App • Connect to cloud directly from the device for
- simple storage solutions or through Canon's uniFLOW Online for secure print workflows\*

#### 

- Fast print speeds at 40ppm (A4)
- Intuitive control with either 5-line LCD or 5" colour touchscreen display
- Double-sided printing as standard
- Up to 900 sheets paper input capacity

## 

- Embedded User Authentication secures device access to authorised persons only
- Ecrypted Secure Print locks down documents data in transit
- Verify System at Start-up with Automatic Recovery enhances device integrity
- Enjoy latest netwrok security protocol with TLS 1.3 support

### SONTROL AND MAINTENANCE

- Cloud and server-based software options for centralised fleet control
- Flexible user management solutions for business administrators and IT department
- Remote access to device control functions
- Toner status tool reduces downtime

## 

- Low energy consumption decreases running costs
- Sleep Mode function and innovative low melting point toner reduce energy consumption further
- Auto Duplex Print decreases paper usage

#### COMPACT DESIGN

- Small footprint and weight allow for any office configuration
- Add additional cassettes for enhanced input capacity without compromising on device size
- All-in-one space saving toner cartridge

\*1440P model only

# QUICK FACTS


## i-SENSYS X 1440P

- 5-inch/12.7cm TFT LCD touchscreen
- Print speed: 40 ppm (A4)
- Print resolution: Up to 1,200 x 1,200 dpi
- Automatic Double-sided printing
- uniFLOW compatibility
- Print directly from Cloud (Dropbox, GoogleDrive, OneDrive)
- Network, USB, Wi-Fi and QR code connectivity
- Max paper input capacity: 900 sheets

#### i-SENSYS X 1440Pr

- 5-line LCD display
- Print Speed: 40ppm (A4)
- Print resolution: up to 1,200 x 1,200 dpi
- Automatic Double-sided printing
- Network, USB and Wi-Fi connectivity
- Max paper input capacity: 900 sheets

# TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

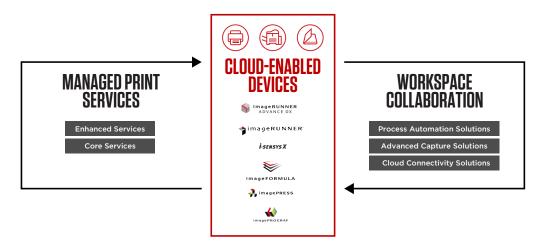

Canon's Digital Transformation Services (DTS), bring together our leading hardware and software into an integrated technology ecosystem, designed to support your transformation journey. This offering combines Managed Print Services and Workspace Collaboration solutions, to help you gain transparency and control over the entire document lifecycle.



# TECHNICAL SPECIFICATIONS

# i-SENSYS X 1440P Series

PRINTER ENGINE		Control panel	i-SENSYS X 1440P : 12.7 cm LCD Colour Touch	
Print speed	Single sided: Up to 40 ppm (A4)		Screen i-SENSYS X 1440Pr : 5 Line LCD, 3 LED (Job, Error,	
	Up to 65.4 ppm(A5-Landscape) Double sided : Up to 33.6 ipm (A4)	CONTROLLER	Energy saver), Buttons, 10-key numeric keypad	
Printing method	Monochrome laser beam printing	Processor Speed	1200MHz	
Print resolution	Up to 1200 x 1200 dpi	Memory	1GB	
Warm-up time	Approx. 14 seconds or less from power on	Storage	4GB eMMC	
First Page Out Time	Approx: 5.0 seconds or less	Printer Languages	UFRII, PCL 5e⁵, PCL6, Adobe® PostScript3	
Recommended Monthly Print Volume	750 - 4,000 pages per month	Fonts	93 PCL fonts, 136 PS fonts	
Duty cycle	80,000 pages	Interface and connectivity	USB 2.0 Hi-Speed, 10BASE-T/	
Print margins Advanced printing features	5 mm-top, bottom, left and right i-SENSYS X 1440P:	interface and connectivity	100BASE-TX/1000Base-T, Wireless 802.11b/g/n, Wireless Direct Connection	
	Encrypted Secure Print Secure Print	Network Protocol	Print:	
	Print from USB memory key (JPEG/TIFF/PDF) Print from Cloud <sup>1</sup> : uniFLOW Online, Dropbox,		TCP/IP (LPD/Port9100/IPP/IPPS/WSD)	
	GoogleDrive, OneDrive (PDF/JPEG)		Management:	
	Barcode Print <sup>2</sup> iOS: AirPrint, Canon PRINT Business app		SNMPv1, SNMPv3 (IPv4,IPv6)	
	Android; Mopria certified, Canon Print Service		Security: TLS1.3, IPSec, IP/Mac address filtering, IEEE802.1X,	
	Plug-in, Canon PRINT Business app Universal Print by Microsoft		SNMPv3, SSL (HTTPS, IPPS)	
			Security (wireless): Infrastructure Mode: WEP(64/128 bit),	
	i-SENSYS X 1440Pr: Encrypted Secure Print		WPA-PSK(TKIP/AES), WPA2-PSK(TKIP/AES),	
	Secure Print Print from USB memory key (JPEG/TIFF/PDF)		WPA-EAP(AES), WPA2-EAP(AES Access Point Mode: WPA2-PSK(AES)	
	Barcode Print <sup>2</sup>	Software and Printer	i-SENSYS X 1440P:	
	iOS: AirPrint, Canon PRINT Business app Android; Mopria certified, Canon Print Service	Management	Remote User Interface (RUI), Remote Operation Viewer,	
	Plug-in, Canon PRINT Business app		Department ID Management,	
	Universal Print by Microsoft		Toner Status Tool, iW Enterprise Management Console: Server-based	
MEDIA HANDLING			software for centralised management of a fleet of devices	
Paper input (Standard)	250-sheet cassette		eMaintenance: embedded RDS allows remote	
	100-sheet multi-purpose tray		eMaintenance services such as meter capture, automatic consumables management and remote	
Paper input (Option)	550-sheet cassette		diagnostics.	
Maximum paper input capacity	900-sheet		Universal Log-in Manager / uniFLOW online / uniFLOW online Express / uniFLOW compatibility /	
Paper output	150-sheet		Application Library	
Media types	Plain paper, Recycled paper, Heavy Paper, Thin paper, Label, Post card, Envelope		i-SENSYS X 1440Pr:	
	paper, Label, Post card, Envelope		Remote User Interface (RUI), Department ID Management,	
Media sizes	Cassette (Standard and optional): A4, A5, A5 (Landscape), A6, B5, Legal, Letter,		Toner Status Tool, iW Enterprise Management Console: Server-based	
	Executive, Statement, OFFICIO, B-OFFICIO,		software for centralised management of a fleet of	
	M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Custom sizes: Min. 105 x 148 mm Max. 216.0 x 355.6 mm.		devices eMaintenance: embedded RDS allows remote	
			eMaintenance services such as meter capture, automatic consumables management and remote	
	Multi-purpose tray: A4, A5, A5 (Landscape), A6, B5, Legal, Letter,		diagnostics.	
	Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Indexcard,	Operating Systems	Windows® 11 / Windows® 10 / Server® 2022 /	
	Envelope (COM10, Monarch, C5, DL), Custom sizes:	Compatibility	Server* 2019 / Server* 2016 / Server* 2012R2 / Server* 2012	
Media weights	Min 76.2 x 127 mm Max. 216.0 x 355.6 mm. Cassette (standard and optional): 60 to 120 g/m <sup>2</sup>		Mac OS X version 10.13 & up	
	Multi-purpose tray: 60 to 199 g/m <sup>2</sup>		Linux <sup>6</sup>	
Double sided printing	A4, Legal, Letter, OFFICIO, B-OFFICIO, M-OFFICIO, GLGL, Foolscap	CONSUMABLES		
	Custom size - Min. 210 x 279.4 mm Max. 216.0 x 355.6 mm	All-in-One cartridges	TONER T13 (10,600 pages <sup>7</sup> )	
	10X. 210.0 X 000.0 milli	ACCESSORIES/ OPTIONS Items	i-SENSYS X 1440P:	
GENERAL FEATURES		itema	Cassette Feeding Module-AH1	
Power requirements	220-240V(±10%) 50/60Hz (±2Hz)		MiCard Multi (Card reader for identification with RFID or magnetic cards with uniFLOW)	
Power consumption	Maximum: Approx. 1,250 W Active printing: Approx. 480W		Micard Plus (Card reader for identification with RFID	
	Standby: Approx. 6 W		or magnetic cards with uniFLOW) MiCard Attachment kit-B1	
	Sleep mode: Approx. 0.9 W Typical Electricity Consumption (TEC): 0.33 kWh/		Barcode Printing Kit-E1E	
	week <sup>8</sup>		i-SENSYS X 1440Pr:	
	For detailed information relating to Lot26 regulation, please go to: http://www.canon-europe.com/For_ Work/Lot26/index.aspx	Mataa	Cassette Feeding Module-AH1 Barcode Printing Kit-E1E	
Noise level	Sound Pressure <sup>3</sup> : Active: 54 dB	Notes: <sup>[1]</sup> Subscription to uniFLOW Online and/or third party cloud service is required.		
	Standby: Inaudible <sup>4</sup>		ory - Barcode Printing Kit-EIE - is required. d noise emission in accordance with ISO 9296.	
	Coursel Dourse in		ission sound pressure level for a bystander is lower than absolute ise in accordance with ISO 7779.	
	Sound Power <sup>3</sup> : Active: 68 dB	<sup>[5]</sup> A Canon PCL5e driver is not	supplied, however PCL5e commands are supported on the device.	
	Standby: Inaudible <sup>4</sup>	[6] Web distribution only.		
Dimensions (W x D x H)	i-SENSYS X 1440P : 438 mm x 373 mm x 312 mm i-SENSYS X 1440Pr : 401 mm x 373 mm x 250 mm	<ul> <li>(7) Based on ISO/IEC 19752</li> <li>(8) As per US ENERGY STAR* version3.0.</li> </ul>		
Weight	i-SENSYS X 1440P : Approx. 9.2 Kg i-SENSYS X 1440Pr: Approx. 8.8 Kg			
Operating environment	Temperature: 10 to 30°C (50 to 86°F)			
-	Humidity 20 to 80% RH (no condensation)			





#### Canon Ireland

3006 Lake Drive Citywest, Saggart Co. Dublin, Ireland Telephone No: 01 2052400 Facsimile No: 01 2052525 canon.ie Canon (UK) Ltd The Bower 4 Roundwood Avenue Stockley Park Uxbridge

UB11 1AF

Canon Inc. canon.com Canon Europe canon-europe.com English edition © Canon Europa N.V.,2023

